



G23

# MIB01

## SURFACE FLUORESCENT LUMINARY

### APPLICATION AREA:

Surface luminary for use in cabins.

### DESIGN:

According to the rules of international classification societies, VDE and IEC.

### HOUSING:

Aluminium, power coated.  
Diffuser made of opal polycarbonate,

### LAMPS:

7-9 Watt G23.

### MOUNTING:


Two mounting holes,  $r$  6mm

### ELECTRIC:

230V 50 or 60Hz,  
Flexible cable, heat resistant up to 105°C.

### CABLE ENTRY:

One cable inlet 20 x 13 mm.

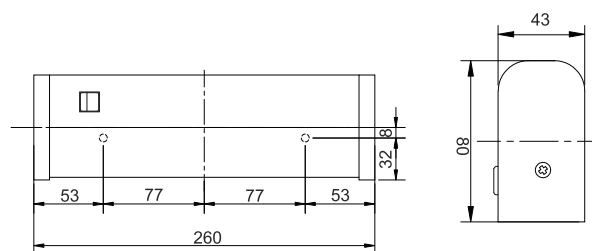

### ORDER CODES:

CODE	VOLTAGE	FREQUENCY	BALLAST	LAMP
MIB01 9-11	230V	50Hz	1 MAGNETIC	G23
MIB01 9-12	230V	60Hz	1 MAGNETIC	G23
MIB01 9-13	110V	60Hz	1 MAGNETIC	G23



MARINE LUMINAIRES