


MIC01

IP22



SURFACE MOUNTED CEILING LUMINARY

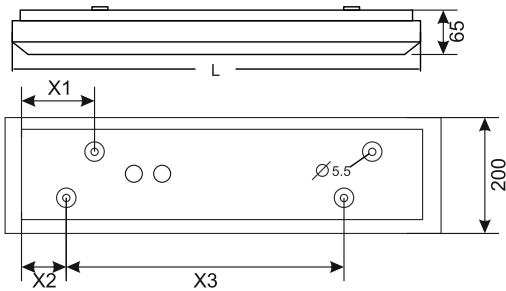

APPLICATION AREA:

Surface luminaire for cabins, passenger facilities, corridors, wheelhouses.

DESIGN:

According to the rules of international classification societies, VDE and IEC.

HOUSING:

Zinc coated steel. powder coated RAL9010.
Diffuser made of opal acrylic.

LAMPS:

18/36 Watt T8.

PROTECTION:

IP22.

MOUNTING:

Four mounting holes 5.5 mm.

ELECTRIC:

230V 50 or 60Hz,
Flexible cable, heat resistant up to 105°C.

CABLE ENTRY:

Two cable inlets 20mm.

OPTIONS:

Transparent diffuser.
Emergency E14 lampholder.

ORDER CODES:

CODE	VOLTAGE	FREQUENCY	L	X1	X2	X1	LAMP
MICR03 218-11	230V	50Hz	670	157	107	382	18W T8
MICR03 218-12	230V	60Hz	670	157	107	382	18W T8
MICR03 218-14	110V	60Hz	670	157	107	382	18W T8
MICR03 218-35	220-240V	50-60Hz	670	157	107	382	18W T8
MICR03 236-11	230V	50Hz	1270	225	170	860	36W T8
MICR03 236-12	230V	60Hz	1270	225	170	860	36W T8
MICR03 236-14	110V	60Hz	1270	225	170	860	36W T8
MICR03 236-35	220-240V	50-60Hz	1270	225	170	860	36W T8

MARINE LUMINAIRES