



IP67

MOS01

SURFACE WATERTIGHT FLUORESCENT LUMINARY

APPLICATION AREA:

Multipurpose luminaries for engine rooms, weather-exposed areas, cargo holds, decks, stores, workshops, industrial areas.

DESIGN:

According to the rules of international classification societies, VDE and IEC.

HOUSING:

Zinc coated steel, powder coated white RAL 9016 (stainless steel version available). Diffuser made of clear polycarbonate, UV stabilized (opal diffuser available).

LAMPS:

18W T8 G13, 36W T8 G13

MOUNTING:

Two holes $\varnothing 8$ (additional mounting systems available, see the drawings).

CONNECTION:

Pass through wiring with terminal 10mm. Junction box.
Pass through with Wieland watertight connector.

ELECTRIC:


230 V 50 or 60 Hz, flexible cable, heat resistant up to 105 °C (additional electrical systems available, please see the order codes table).

CABLE ENTRY:

Two cable glands M20 and two stop plugs M20.

ORDER CODES:

| CODE | VOLTAGE | FREQUENCY | BALLAST | LAMP |
|-------------|----------|-----------|-----------------------------|------|
| MOS01118-11 | 230V | 50Hz | 1 MAGNETIC | G23 |
| MOS01118-12 | 230V | 60Hz | 1 MAGNETIC | G23 |
| MOS01118-14 | 110V | 60Hz | 1 MAGNETIC | G23 |
| MOS01118-35 | 220-240V | 50-60Hz | 1 ELECTRONIC | G23 |
| MOS01118-45 | 220-240V | 50-60Hz | 1 ELECTRONIC + 3H EMERGENCY | G23 |
| MOS01218-21 | 230V | 50Hz | 2 MAGNETIC | G23 |
| MOS01218-22 | 230V | 60Hz | 2 MAGNETIC | G23 |
| MOS01218-24 | 110V | 60Hz | 2 MAGNETIC | G23 |
| MOS01218-35 | 220-240V | 50-60Hz | 1 ELECTRONIC | G23 |
| MOS01218-45 | 220-240V | 50-60Hz | 1 ELECTRONIC + 3H EMERGENCY | G23 |
| MOS01136-11 | 230V | 50Hz | 1 MAGNETIC | G23 |
| MOS01136-12 | 230V | 60Hz | 1 MAGNETIC | G23 |
| MOS01136-14 | 110V | 60Hz | 1 MAGNETIC | G23 |
| MOS01136-35 | 220-240V | 50-60Hz | 1 ELECTRONIC | G23 |
| MOS01136-45 | 220-240V | 50-60Hz | 1 ELECTRONIC + 3H EMERGENCY | G23 |
| MOS01236-11 | 230V | 50Hz | 2 MAGNETIC | G23 |
| MOS01236-12 | 230V | 60Hz | 2 MAGNETIC | G23 |
| MOS01236-14 | 110V | 60Hz | 2 MAGNETIC | G23 |
| MOS01236-35 | 220-240V | 50-60Hz | 1 ELECTRONIC | G23 |
| MOS01236-45 | 220-240V | 50-60Hz | 1 ELECTRONIC + 3H EMERGENCY | G23 |

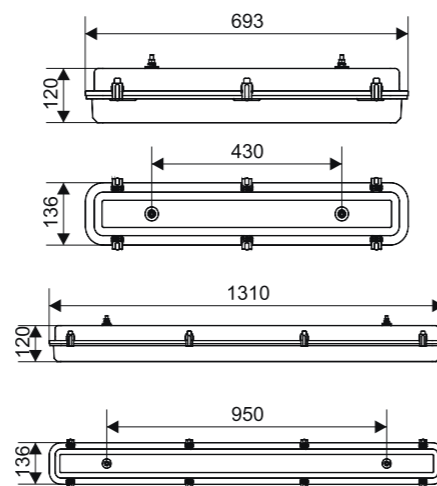

MOS02

IP67



SURFACE WATERTIGHT LED LUMINARY

APPLICATION AREA:

Multipurpose led luminaries for engine rooms, weather-exposed areas, cargo holds, decks, stores, workshops, industrial areas.

DESIGN:

According to the rules of international classification societies, VDE and IEC.

HOUSING:

Zinc coated steel, powder coated white RAL 9016 (stainless steel version available). Diffuser made of clear polycarbonate, UV stabilized (opal diffuser available).

LAMPS

LED modules.

MOUNTING:

Two holes $\varnothing 8$ (additional mounting systems available, see the drawings)

CONNECTION:

Pass through wiring with terminal 10mm Junction box.
Pass through with Wieland watertight connector

ELECTRIC:

230 V 50-60 Hz, flexible cable, heat resistant up to 105 °C (additional electrical systems available, please see the order codes table)

CABLE ENTRY:

Four cable grommets M20

ORDER CODES:

| CODE | VOLTAGE | FREQUENCY | POWER | CCT | CRI |
|-----------------|----------|-----------|-------|-------|-----|
| MOS02 LED-56-3 | 220-240V | 50-60Hz | 17W | 3000K | >80 |
| MOS02 LED-56-4 | 220-240V | 50-60Hz | 17W | 4000K | >80 |
| MOS02 LED-56-5 | 220-240V | 50-60Hz | 17W | 5000K | >80 |
| MOS02 LED-112-3 | 220-240V | 50-60Hz | 33W | 3000K | >80 |
| MOS02 LED-112-4 | 220-240V | 50-60Hz | 33W | 4000K | >80 |
| MOS02 LED-112-5 | 220-240V | 50-60Hz | 33W | 5000K | >80 |

