



IP67

MOSLINEAR



LED WATERTIGHT LINEAR LUMINAIRE

KEY FEATURES:

- | Super thin light weight design. Specially design high transmission PC diffuser for visual comfort.
- | Superior thermal design to allow the luminaire to operate at high ambient temperature of up to 50°C.
- | Designed with reliable AC driver on board to enhance the service life.
- | Designed with junction box for fast termination.
- | Ideal for upgrading existing conventional watertight fixture.
- | Long service life of 100,000 hours.
- | Marine class compliance.



APPLICATION AREA:

Decks, Marinas, Docks, Ports, Warehouses.

MOUNTING METHOD:

Surface mounted.

MATERIAL:


Diffuser: Polycarbonate.
 Housing: Zinc coated steel.
 Powder coated white.

OPTIONS:

Stainless steel housing.
 3 hours emergency battery pack.
 24V DC emergency system.

WEIGHT:

2.0Kg.

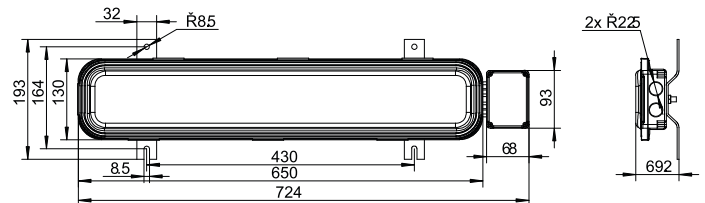

Ideal Replacement: 2 X 18W

ORDER CODES:

CODE	DIMENSIONS (LxWxH)	MAIN VOLTAGE	POWER	CCT	AMBIENT TEMP	SYSTEM LUMEN
MOSLINEAR LED I205V0	650x130x49.2mm	100V ~ 120V AC / 220V ~ 240V AC	20W	5,000K	-30 ~ 50°C	2000lm